

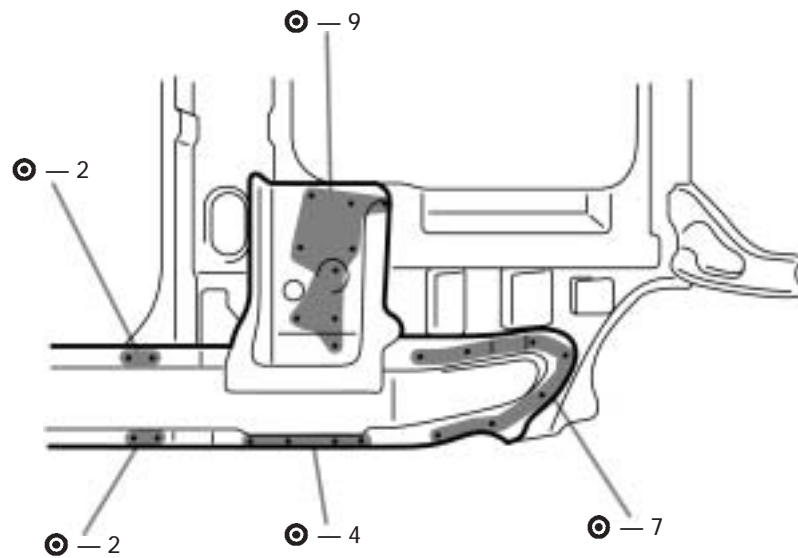
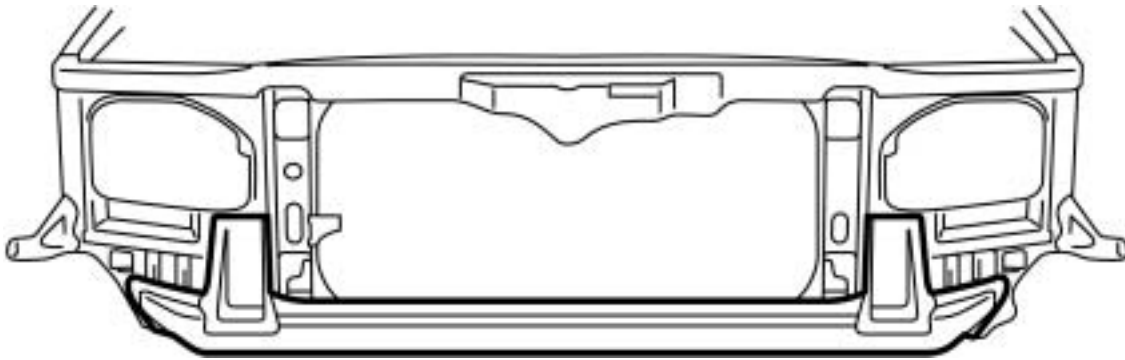
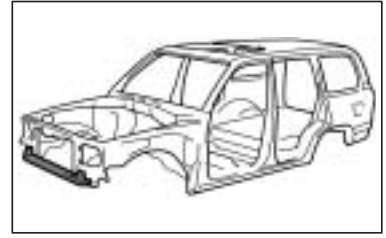


## FRONT CROSSMEMBER (ASSY)

### REMOVAL

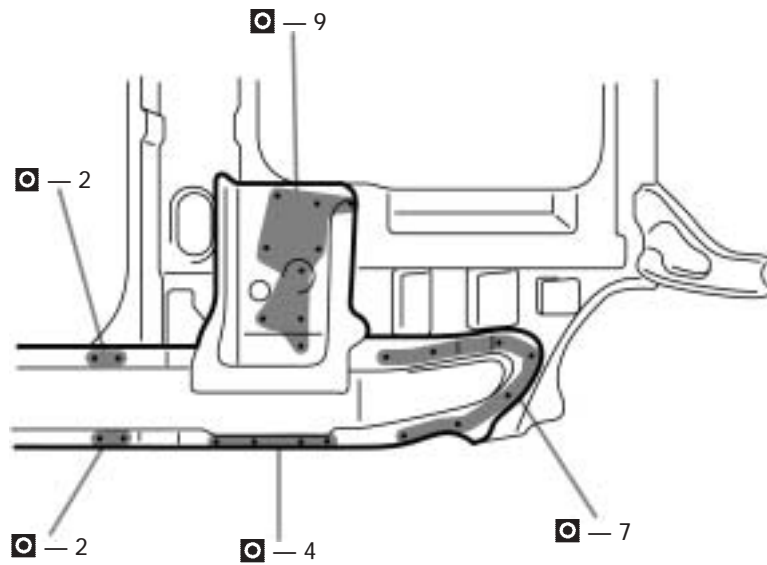

## INSTALLATION

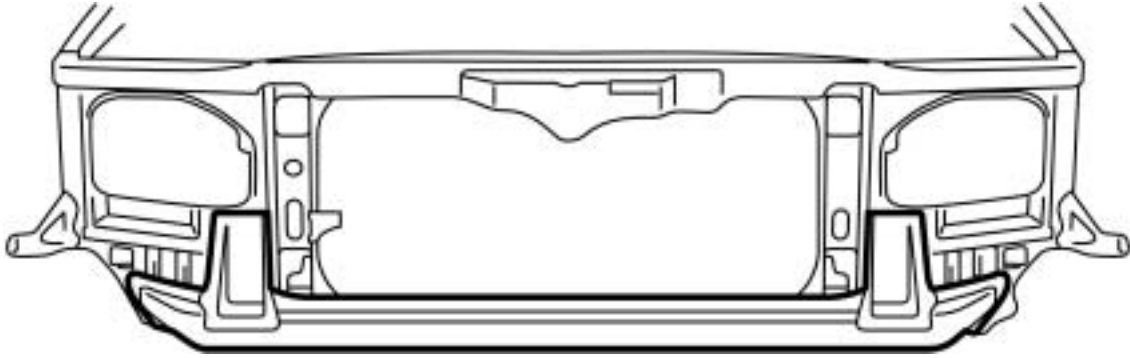

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.