



## ■ REAR AXLE


- The full-floating axle is used on the rigid axle front suspension model.
- The semi-floating axle is used on the independent front suspension model.
- The axle housing is provided with large reinforcements to realize excellent rigidity.

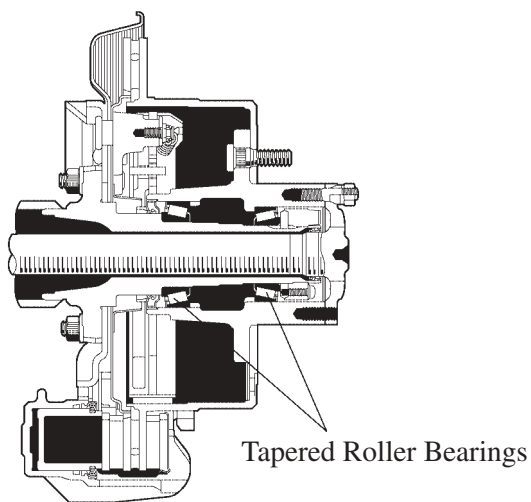

**Rigid Front Suspension Model**

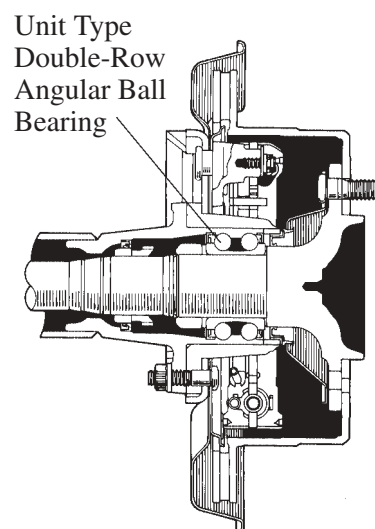

**Independent Front Suspension Model**

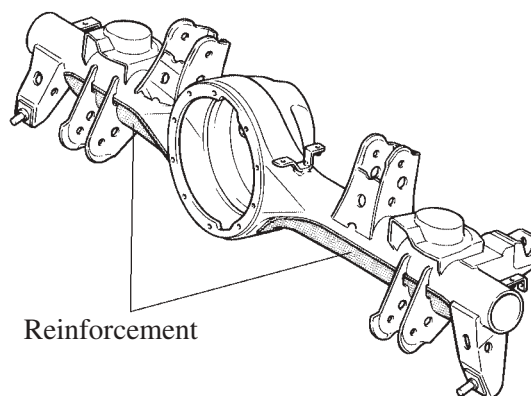

155CH55