


FUEL CUT RPM FUEL CUT PRM INSPECTION

EG161-04

1. WARM UP ENGINE

Allow the engine to warm up to normal operating temperature.

EG

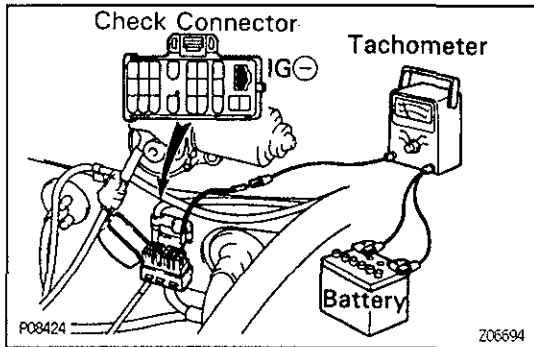


2. CONNECT TACHOMETER TO ENGINE

Connect the test probe of a tachometer to terminal IG \ominus of the check connector.

NOTICE:

- Never allow the tachometer terminal to touch ground as it could result in damage to the igniter and/or ignition coil.
- As some tachometers are not compatible with this ignition system, we recommend that you confirm the compatibility of your before use.

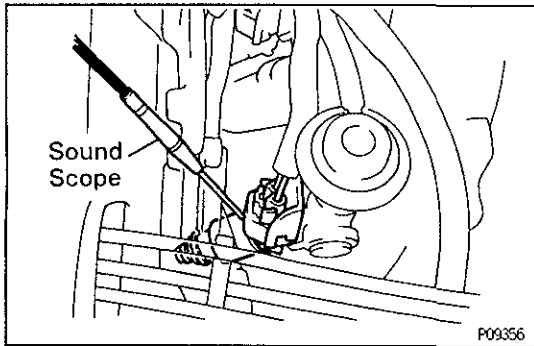

3. INSPECT FUEL CUT PRM

- Increase the engine speed to at least 3,000 rpm.
- Using a sound scope, check for injector operating sound.
- Check that when the throttle lever is released, injector operation sound stops momentarily and then resumes.

HINT: Measure with the A/C OFF.

Fuel return speed:

1,200 rpm

4. DISCONNECT TACHOMETER