

## INSTALLATION


### 1. INSTALL REAR AXLE HUB

- (a) Clean the hub installation position of the axle housing and apply light coat of MP grease.
- (b) Place the axle hub to the axle housing.

#### NOTICE:

**Be careful not to damage the oil seal.**

- (c) Install the outer bearing.

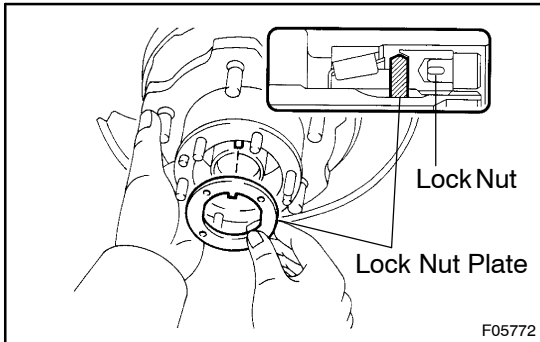

### 2. INSTALL LOCK NUT PLATE AND REAR AXLE BEARING LOCK NUT


- (a) Place the lock nut plate on the axle housing, making sure the tongue lines up with the key groove.
- (b) Temporarily install the lock nut.

### 3. DRUM BRAKE: INSTALL DRUM

### 4. DISC BRAKE: INSTALL DISC AND BRAKE CALIPER


- (a) Install the disc.
- (b) Install the brake caliper with 2 bolts and washers.

**Torque: 103 N·m ( 1,050 kgf·cm, 76 ft·lbf)**

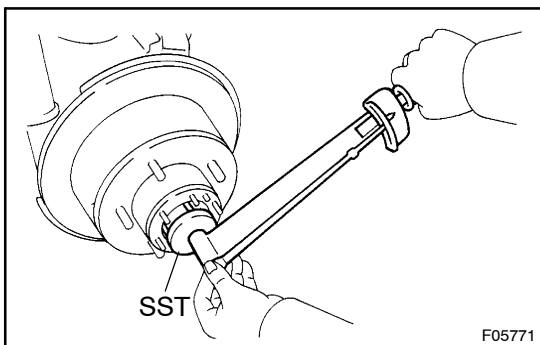

### 5. ADJUST PRELOAD


- (a) Using SST, torque the bearing lock nut.  
SST 09509 –25011  
**Torque: 59 N·m (600 kgf·cm, 43 ft·lbf)**
- (b) Make the bearing smooth by turning the hub several times.
- (c) Using SST, retighten the bearing lock nut.  
**Torque: 59 N·m (600 kgf·cm, 43 ft·lbf)**
- (d) Using SST, loosen the nut until it can be turned by hand.

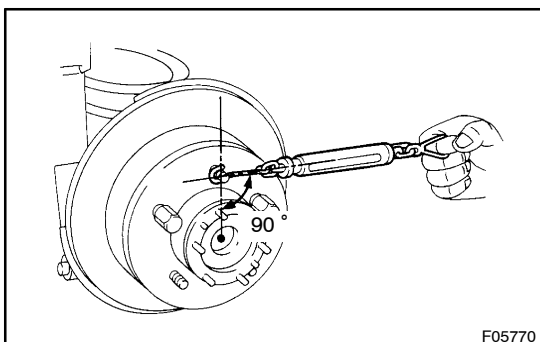


- (e) Using a spring tension gauge, check the preload and tighten the nut until the preload is within the specification.  
**Preload (at starting):**  
**24 – 52 N (2.4 – 5.3 kgf, 6.4 – 11.7 lbf)**

#### NOTICE:

**Make sure that there is no contact with the parking brake shoe.**

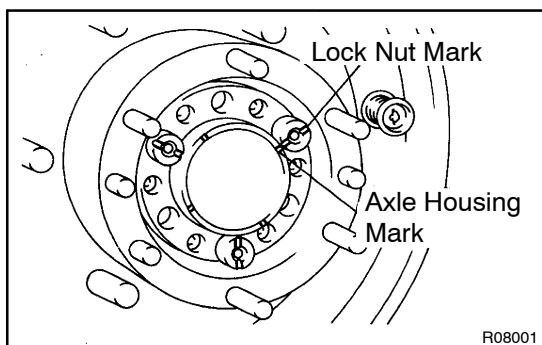

- (f) Align the mark on the bearing lock nut and tip of axle housing under the above preload range.

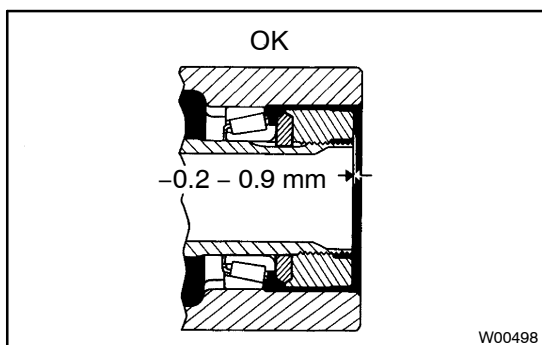

- (g) Check the distance between the top surface of axle housing and lock nut.

**Standard distance:**

**-0.2 mm – 0.9 mm (-0.0079 – 0.0354 in.)**

If the distance is greater than the specification, reassemble the lock nut plate.

- (h) Check that the hub with disc rotates smoothly and hub has no axial play.

#### 6. INSTALL BEARING LOCK NUT SCREW

Tighten the 2 lock nut screws.

**Torque: 5.4 N·m (55 kgf·cm, 48 in·lbf)**

#### 7. INSTALL REAR AXLE SHAFT (See page SA-158)

#### 8. INSTALL REAR WHEEL

**Torque: 209 N·m (2,131 kgf·cm, 154 ft·lbf)**

#### 9. w/ ABS:

**CHECK ABS SPEED SENSOR SIGNAL**

(See page DI-312)