


<b>DTC</b>	<b>C 1244 / 44</b>	<b>Deceleration Sensor Circuit</b>
------------	--------------------	------------------------------------

## CIRCUIT DESCRIPTION

This sensor detects deceleration on the vehicle. The sensor signal is used in ABS & BA & TRC & VSC control. If the sensor functions abnormally, the ABS warning light comes on.

DTC No.	DTC Detecting Condition	Trouble Area
C1244 / 44	<p>Either of the following 1., 2., 3. or 4. is detected:</p> <ol style="list-style-type: none"> <li>1. The condition that ECU terminals GL1 and GL2 values are -1.5 G or less or 1.5 G or more continues for 1.2 sec. or more.</li> <li>2. The condition that the deceleration sensor terminal VGS voltage is 4.4 V or less or 5.6 V or more continues for 1.2 sec. or more.</li> <li>3. At the vehicle speed of 0 km/h (0 mph), after the difference of output value between deceleration sensor terminals GL1 and GL2 becomes 0.6 G or more, and the condition that does not become 0.4 G or less continues for 60 sec. or more.</li> <li>4. Deceleration sensor signal momentary open occurs for 7 times or more.</li> </ol>	<ul style="list-style-type: none"> <li>• Deceleration sensor</li> <li>• Deceleration sensor circuit</li> </ul>

## WIRING DIAGRAM

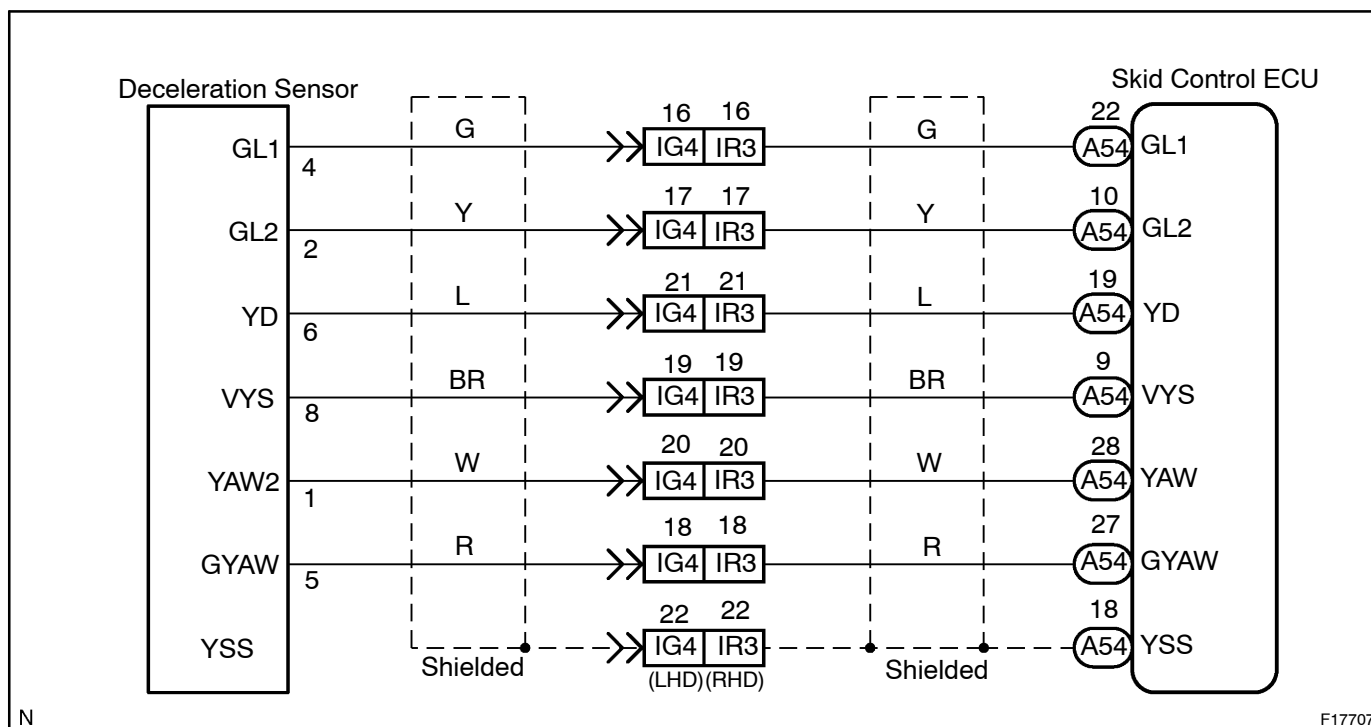

## INSPECTION PROCEDURE


- 1 Check for open and short circuit in harness and connector between deceleration sensor and skid control ECU (See page IN-38).

NG

Repair or replace harness or connector.

OK

- 2 Check deceleration sensor.

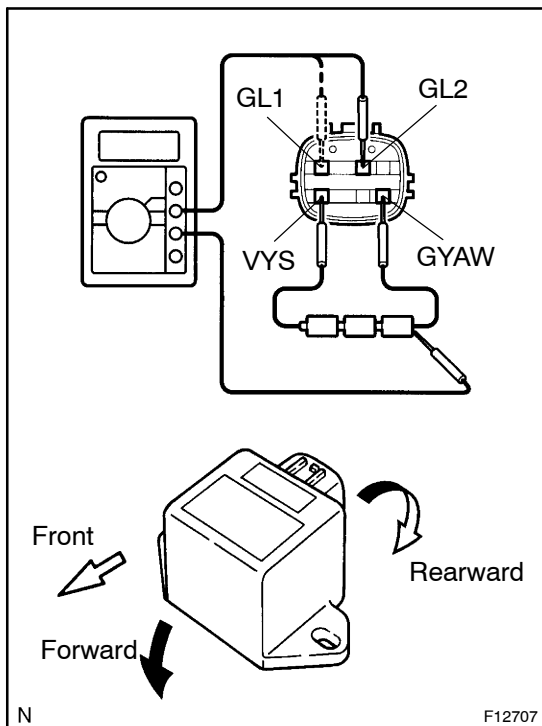

### PREPARATION:

- (a) Connect 3 dry batteries of 1.5 V in series.
- (b) Connect VYS terminal to the batteries' positive (+) terminal, and GYAW terminal to the batteries' negative (–) terminal. Apply about 4.5 V between VYS and GYAW terminals.

### NOTICE:

Do not apply voltage of 6 V or more to terminals VYS and GYAW.

### CHECK:

Check the output voltage of GL1 and GL2 terminals when the sensor is tilted forward and rearward.

### OK:

Symbols	Condition	Standard Value
GL1	Horizontal	About 2.3 V
GL1	Lean rearward	1.0 V – about 2.3 V
GL1	Lean forward	About 2.3 V – 3.5 V
GL2	Horizontal	About 2.3 V
GL2	Lean rearward	About 2.3 V – 3.5 V
GL2	Lean forward	1.0 V – about 2.3 V

### HINT:

- If the sensor is tilted too much it may show the wrong value.
- If dropped, the sensor should be replaced with a new one.
- The sensor removed from the vehicle should not be placed upside down.

NG

Replace deceleration sensor.

OK

**Check and replace skid control ECU.**